

USAI RECESS PINHOLE INSTALLATION INSTRUCTIONS


Trims

CAUTION READ BEFORE INSTALLATION

- Retain these instructions for future reference. This product must be installed by a person familiar with the construction and operation of the product and the hazards involved, in accordance with applicable NEC code.
- Switch off main power before beginning installation.
- Install per national installation and accident prevention regulations.
- Clearance between sides of luminaire and parts of building to be 1/2 inch minimum; clearance to insulating materials to be 3 inch minimum, unless luminaire is IC rated.
- Fixtures must be installed in applications where the ambient temperature does not exceed 40° C during normal operation.
- **DO NOT** connect or disconnect LED board wire connector when the fixture is energized. This may result in permanent damage to the LED array.
- Warranty claims will not be accepted if incorrect driver or light engine is used.

TRIM INSTALLATION:

1. Make electrical connection.
2. Attach safety cable to trim.
3. Insert trim by pressing mounting springs to guide into opening and push up until flange is flush with ceiling.

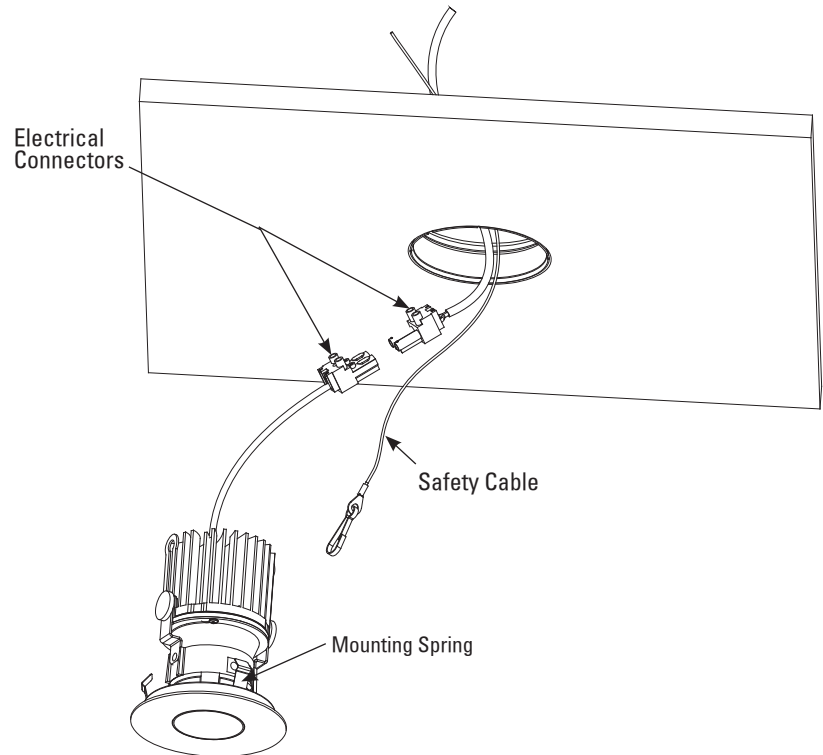

ADJUSTABLE TRIM ADJUSTMENT:

VERTICAL ADJUSTMENT:

Lift internal assembly and adjust vertically from 0°-35°.

HORIZONTAL ADJUSTMENT:

Rotate internal baffle to desired position.

