


Recess 4.5"

Infinite Color+ Wall Wash

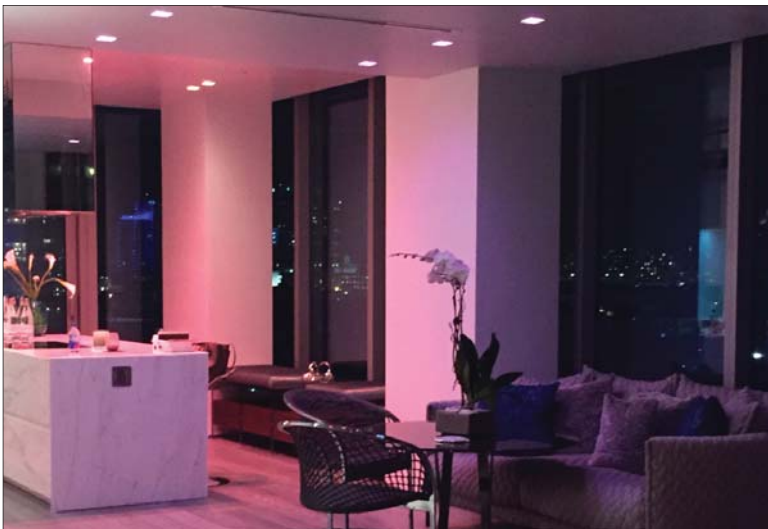

Recess 4.5 inch Infinite Color+ Wall Wash


An elegant solution for a variety of applications. Featuring clean, architectural grade finishes and full dynamic color plus tunable architectural white light capability, the Recess 4.5 installs beautifully into all ceiling types, including drywall, stone, and wood and makes every space look its best.

- **Ideal Applications:** Medium to Large-Scaled Spaces
- **Recommended for Ceiling Height:** 14' – 20'
- **Light Type:** Saturated, colorful light, pastels, neutrals and whites, tunable and dynamically variable to suit your preference

4.5" WALL WASH PERFORMANCE DATA

	Infinite Color+	
	White Light Channel Only	Multi Channel Output
Delivered Lumens:	1025	1225
Lumens Per Watt:	45	38
Source Lumens:	1450	1725
Wattage	23W	32W
Beamspread:	Wall Wash Fixed Asymmetric	

Round Trims

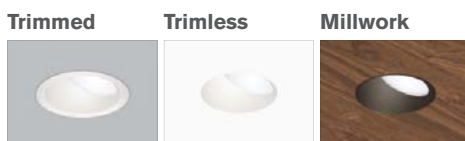


Square Trims



Universal and Field Convertible - Trim | Trimless | Millwork

PHOTOMETRIC DATA

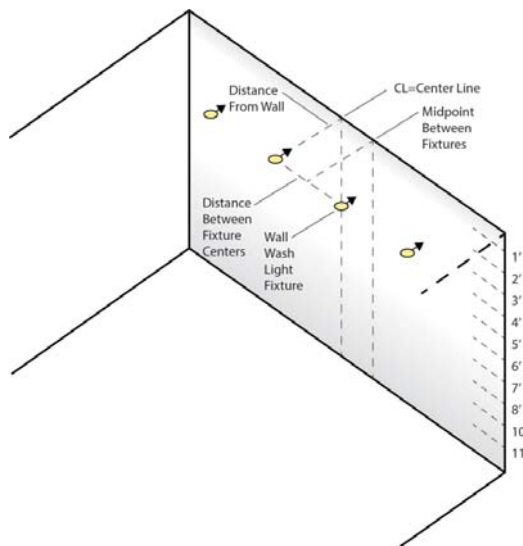

Infinite Color Wall Wash With White LED Only												
Multiple Units Footcandles												
From Ceiling	2' From Wall				3' From Wall				4' From Wall			
	2' Centers		3' Centers		3' Centers		4' Centers		4' Centers		5' Centers	
	CL	Mid	CL	Mid	CL	Mid	CL	Mid	CL	Mid	CL	Mid
1'	19	18	14	12	5	5	4	4	2	2	2	2
2'	33	33	24	22	12	12	9	9	5	5	4	4
3'	30	29	21	21	16	16	12	12	8	8	6	6
4'	21	20	15	15	15	15	12	11	9	9	7	7
5'	14	14	11	11	12	12	10	9	9	9	7	7
6'	9	9	8	8	9	9	8	8	8	8	6	6
7'	7	7	6	6	7	7	6	6	6	6	5	5
8'	5	5	4	4	6	6	5	5	5	5	5	5
9'	4	4	3	3	4	4	4	4	4	4	4	4
10'	3	3	3	3	4	4	3	3	4	4	3	3
11'	2	2	2	2	3	3	3	3	3	3	3	3
12'	2	2	2	2	3	3	2	2	3	3	2	2
13'	2	2	2	2	2	2	2	2	2	2	2	2
14'	2	2	2	2	2	2	2	2	2	2	2	2

CL= Center Line of Fixture. Mid=Midpoint between two fixtures
= maximum Light Level


Average light levels are provided in the tables above, for a range of lighting fixture layouts and ceiling heights. All illuminance values are reported in average footcandles (fc) and measured at the wall at heights indicated.

Recess 4.5" Infinite Color+ Wall Wash



Four Easy Steps to Specify

1 Select Housing Type

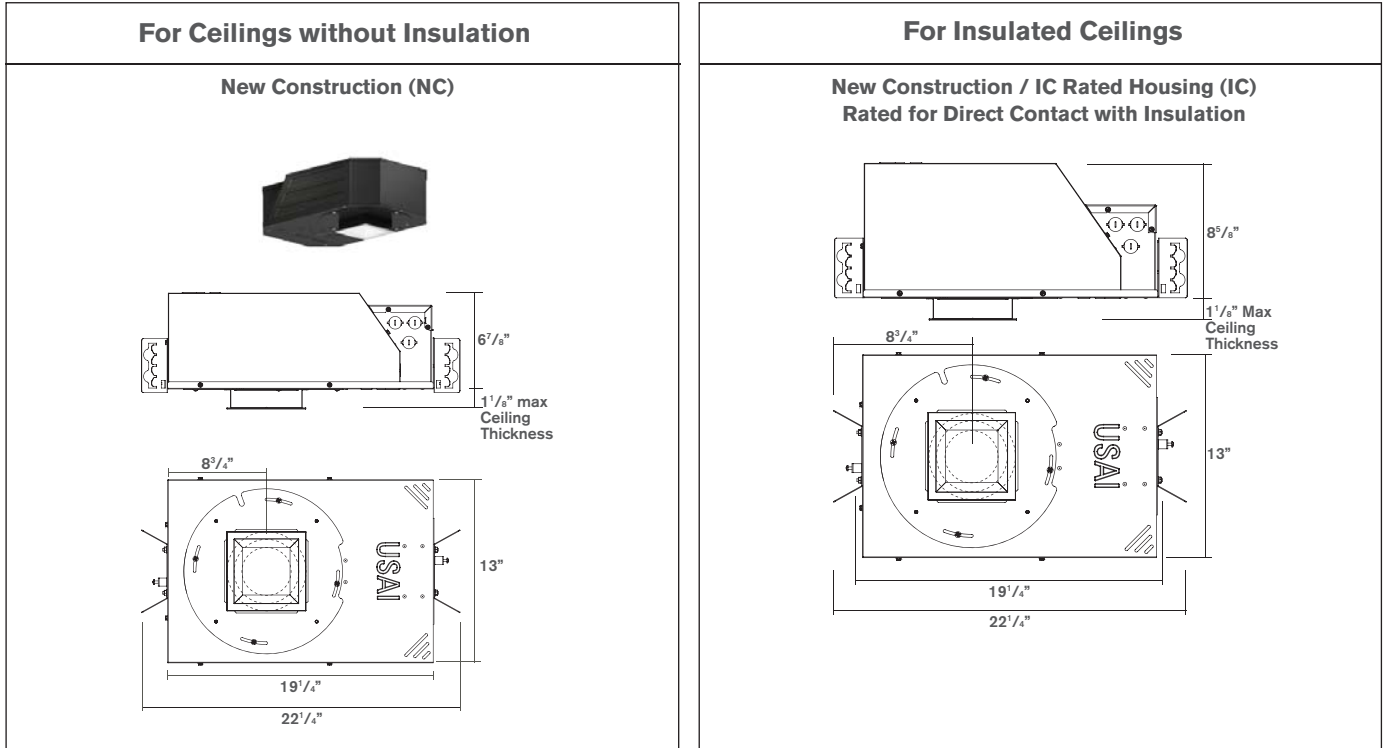

2 Select Shape

Square

Round



3 Select Trim Style For Ceiling Type

Trimmed New Construction / IC Rated Housing (IC)

Trimless (P) for Sheetrock Ceilings Only (Must be Spackled In)

Millwork (M) for Millwork and Stone Ceilings



Recess 4.5" Infinite Color+ Wall Wash



4 Select Trim Finish



How to Specify

Manufacturer	Light Fixture Type			LED + Control		Options					Revision
USAI	4DL	W1		FC1	IX32A			X	M		00
USAI	Family	Function	Housing Type	LED Color	Wattage Driver	Shape	Style	Beam Spread	Lens	Finish	Version
USAI Lighting	4DL 4.5" Downlight, 32W	W1 Fixed Asymmetric Wall Wash	NC New Construction Housing IC New Construction / IC Rated Housing / Airtight	FC1 Full Color plus Tunable White, Dynamically Variable through DMX controls	IX32A Integral DMX Digital Dimming Driver, to 0.1%, 120V-277V, 32W	R Round S Square	F Trimmed P Trimless M Millwork	X Wall Wash	M Multi Diffusion	WH White (provided standard) BL Black BZ Statuary Bronze GR Metalized Grey PR Primer AC Clear Matte Anodized AB Black Anodized	00

Recess 4.5" Infinite Color+ Wall Wash

RECESS 4.5 SPECIFICATIONS

FIELD REPLACEABLE LED LIGHT ENGINE

is serviceable through the aperture without tools or with a Philips screwdriver. All USAI Lighting light engines feature industry-leading color consistency.

FIELD REPLACEABLE DRIVER

All integral dimming drivers are located within the fixture housing and are serviceable from below the ceiling through the aperture. Some on-time delay may be experienced depending on control system used. All dimming drivers comply with IEEE C62.41 surge protection.

HOUSING

All Recess 4.5 fixtures are field-flexible which allow for field changes from trimless or millwork to trimmed with a simple components change with parts from USAI. Housings are fabricated of 20 ga. steel construction with thru wire J-box, 4 in 4 out at min. 90°C, #12 AWG thru branch circuit wiring.

ADJUSTMENT

362° horizontal locking in 90° increments.

FIXTURE WEIGHT

NC and IC housings weigh 16 lbs.

CEILING CUT OUT

Trimmed with Overlap Flange Round: 5-1/16" Ø
Trimmed with Overlap Flange Square: 5-1/16" x 5-1/16"
Trimless Spackle-in Round: 5-1/2" Ø
Trimless Spackle-in Square: 5-1/2" x 5-1/2"
Millwork: Knife-edge Round: 4-15/16" Ø
Millwork: Knife-edge Square: 4-15/16" x 4-15/16"

LISTINGS

Dry/Damp/Wet location. AC and AB trim finishes are dry/damp only. UL2043 rated for use in air handling plenums. NRTL/CSA-US tested to UL standards. IBEW union made.



NOTES

- Not for use in corrosive environment
- Use of pressure washer voids warranty

PHOTOMETRICS

Consult factory or website for IES files. Tested in accordance with IESNA LM79.